


## RF Single Color Remote Controller




**Important:** Read All Instructions Prior to Installation

### Function introduction

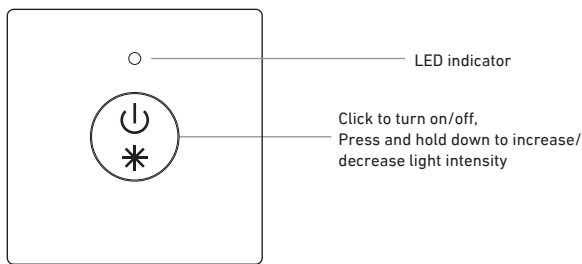

Front side

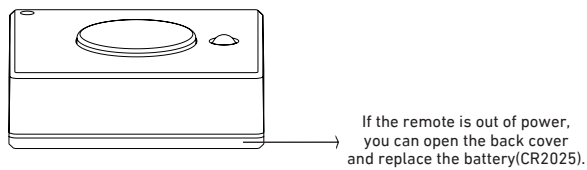

09.28075.041 34

### Product Data

Output	RF signal
Operation Frequency	868/915/434MHz
Power Supply	3V(CR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	32 x 32 x 9.8 mm

- > Control 1 zone
- > Single color controller
- > Memory Function
- > Compatible with all universal series RF receivers
- > 1 receiver can be paired by max 8 different remote controls.
- > Waterproof grade: IP20

### Safety & Warnings

- > This device contains a button lithium battery that shall be stored and disposed properly.
- > DO NOT expose the device to moisture.

## Operation

### 1. Pair with RF receivers:

Click "Learning Key" on RF receiver → Click \* button on RF remote → LED lights connected with the RF receiver will flicker once → The receiver is paired with remote successfully.


### 2. How to delete the pairing:

Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.

Photo:



Diagram:

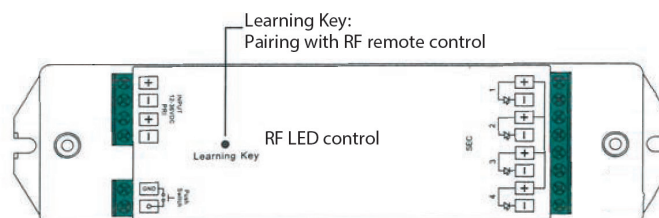

**EC Declaration of Conformity (EC DoC)**

According to the Low voltage directive 2014/35/EU, EMC Directive 2014/30/EU and RoHS Directive 2011/65/EU

Type of Equipment: LED kit with dimmer+PS 3455mm. 24V  
Brand Name and trademark: Develtron A/S  
Type Designation: DOLLE LED kit  
Manufacturer: Develtron A/S  
Address: Ribevej 13B  
8940 Randers SV.  
Telephone: +4570270730

The following products are compliant with this document.

- SL3003410 DOLLE LED kit with dimmer+PS 3455mm 24V

The LED Kit complies with good engineering practices in safety matters, and the included sub components are all compliant with the CE directive and the RoHS Directive 2011/65/EU.

The following components are compliant with RoHS Directive 2011/65/EU.

> LEDStrip: 640041 Coo 24V LED 19,2W 3000K 300LED/m IP20  
> LED Driver: 600245 24VDC LED PS 75W -Snappy  
> RF LED Dimmer: 22742 Dimmer 4x60W for remote control  
> Remote control: 20222 RF remote control 1 zone silver/grey  
> Power cord: 15856 Male 230V Power cable 2-pin white  
> LED strip cable: 15820 PI connector 20c m male white  
> LED PS cable: 15817-3A PI connector 20 cm female white

The lamps estimated life cycle 30.000 hours.

  
Peter Johansen  
develtron@develtron.dk

Date: 22-03-2021